

Procon Rotary Vane Stainless Steel Pump Series 3

Overview

The Rotary Vane Stainless Steel Pump Series 3 is engineered for durability, precision, and reliability in fluid transfer applications. With a flow rate of 35 GPH (100 LPH), this compact yet efficient pump is ideal for systems requiring moderate flow with consistent performance. Featuring a stainless steel housing, it offers excellent corrosion resistance, making it suitable for both industrial and commercial environments.



Produk Details

- Consistent flow rate across variable pressures
- Self-priming (water) and maintenance-free with low vibration and pulsation characteristics
- Internal Relief Valve External adjust configuration
- Stainless Steel Housing Material
- NPT 3/8" Inlet and Outlet Connections
- Constructed with EPDM/Nitrile Elastomers
- Flowrate of 35GPH (100LPH)*
- Fluid Operating Temperature of between -4°F to 160°F (-20°C to 71°C)
- Maximum Mechanical Horsepower required 0.29hp (216W)¹

Top Feature





- Consistent flow rate across variable pressures
- Self-priming (water) and maintenance-free with low vibration and pulsation characteristics
- Internal Relief Valve External adjust configuration
- Stainless Steel Housing Material
- NPT 3/8" Inlet and Outlet Connections
- Constructed with EPDM/Nitrile Elastomers
- Flowrate of 35GPH (100LPH)*
- Fluid Operating Temperature of between -4°F to 160°F (-20°C to 71°C)
- Maximum Mechanical Horsepower required 0.29hp (216W)¹

Specification

- Flow Rate GPH: 35GPH
- Flow Rate LPH: 100LPH
- Agency Approvals: Food grade Material - No Agency Approval (1.5% Max Lead)
- Material: Stainless Steel
- Port Hole: NPT 3/8"
- Mounting Type: Clamp-On
- Drive Configuration: Single Flat
- Elastomer: EPDM/Nitrile
- Seal Type: Non Balances Ceramic/Carbon
- Rotation: Clockwise
- Internal Component Material: Carbon
- Valve Type: Solid- Ultem
- Valve Configuration: External adjust
- Product Weight: 2.3lb (1.04Kg)
- Operating Range: Max Operating Pressure 150psi
- Maximum Mechanical Power Requirement 0.29hp (216W)
- Relief Valve Set Pressure Range: 151 to 250psi (10 to 17.5 BAR)
- Max Static Pressure PSI: 100psi
- Min Operation: Fluid Temperature -4°F
- Max Operation: Fluid Temperature 160°F
- Max Fluid Viscosity: 100cP
- Max Sound Level: 60dB(a)
- Max Discharge Pressure: 250psi
- MinSpeed: 1000RPM
- Max Speed: 2400RPM
- Dry Suction Lift: 3.3ft
- Wet Suction Lift: 6.6ft
- Fluid Acidity: 2p



**SERIES 3
ROTARY VANE PUMP
CLAMP-ON STYLE
"S" MOUNTING
3/8" NPT PORTS
WITH RELIEF VALVE**

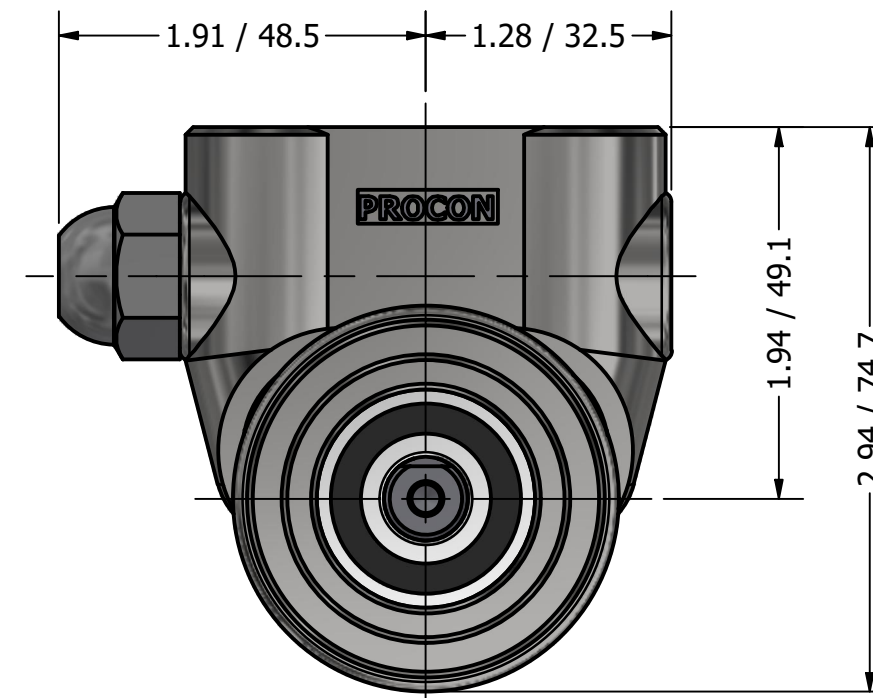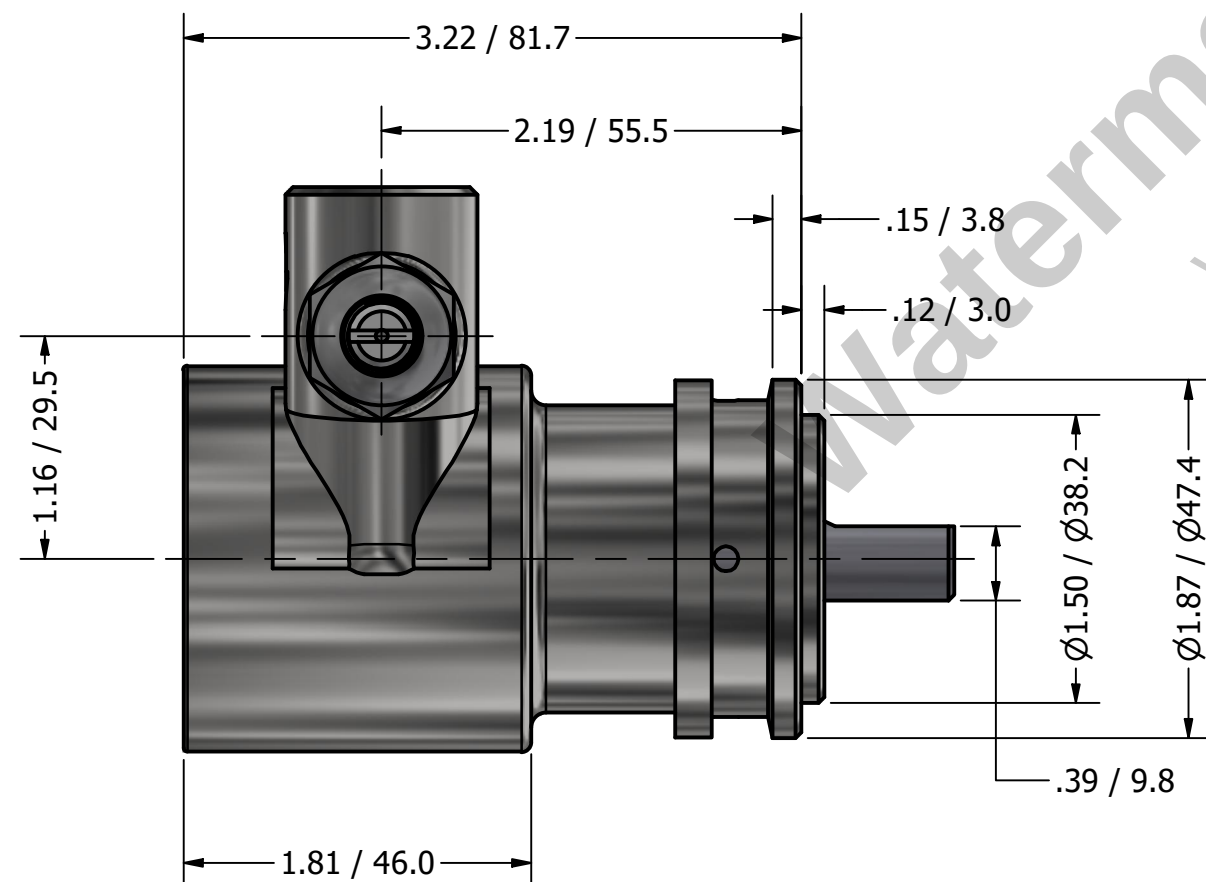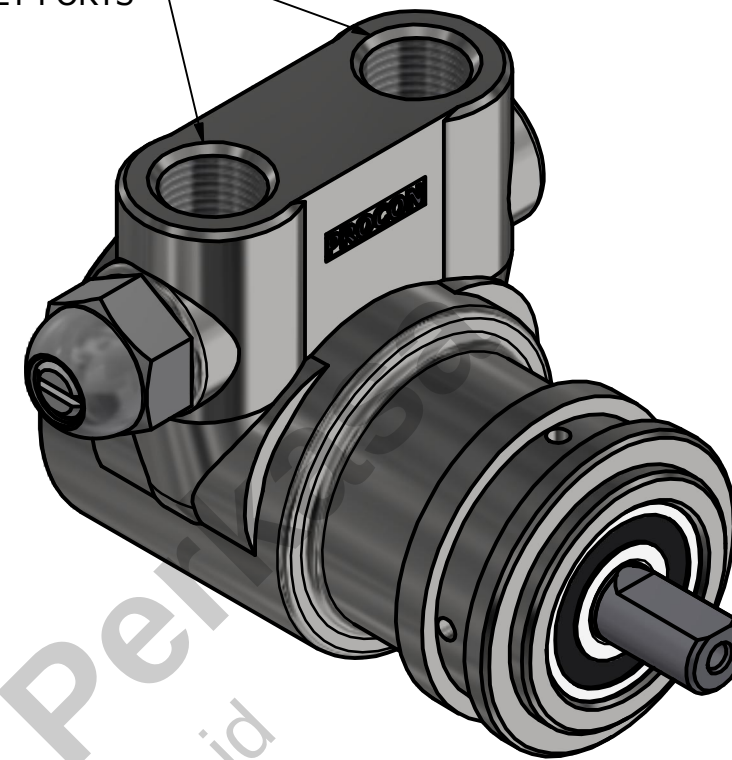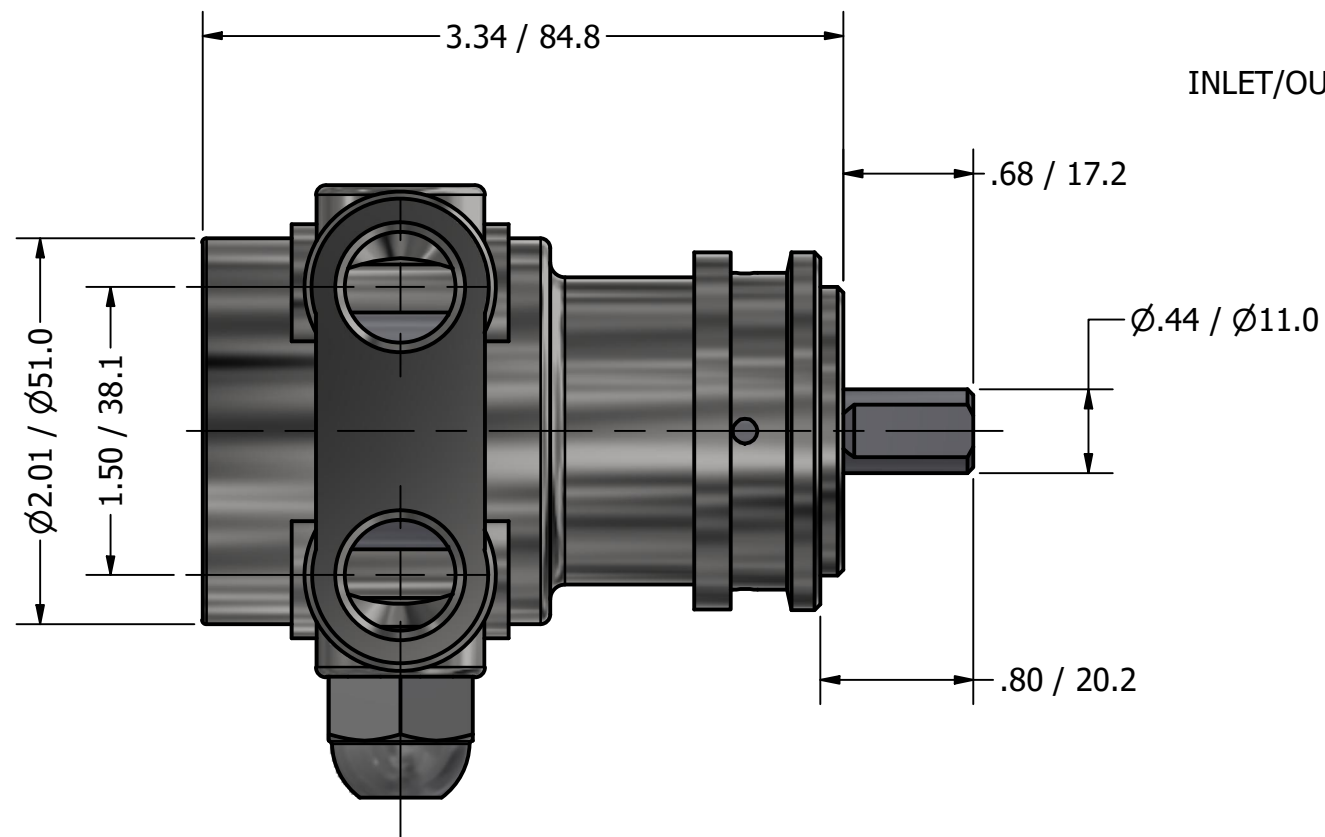

PROCON®



PT Watermart Perkasa
Email: sales@water.co.id Phone: +62-21-316-1671
Whatsapp (text only): +62815-8609-3500
Website: www.water.co.id

Series 1, 2, and 3 Nominal Volume*

Flow rate (GPH/ LPH)	Gallons Per Hour / Liters Per Hour					Brake Horsepower / Watts (motor shaft power)				
	Pressure (PSI/Bar)					Pressure (PSI/Bar)				
	50/3.4	100/6.9	150/10.3	200/13.8	250/17.5	50/3.4	100/6.9	150/10.3	200/13.8	250/17.5
140/425	143/447	141/441	139/434	137/428	135/422	0.17/127	0.28/209	0.40/298	0.52/387	0.63/469
125/375	128/400	126/394	124/388	122/381	120/375	0.16/119	0.26/194	0.36/268	0.47/350	0.57/425
110/330	111/347	109/341	107/334	105/328	103/322	0.15/112	0.25/186	0.34/253	0.44/328	0.54/402
100/300	102/319	100/313	98/306	96/300	94/294	0.13/97	0.20/149	0.28/209	0.35/261	0.42/313
80/240	82/257	80/256	78/244	76/238	74/231	0.12/89	0.18/134	0.25/186	0.32/238	0.39/291
70/210	72/225	70/219	68/213	66/206	64/200	0.11/82	0.17/127	0.24/179	0.30/224	0.37/276
60/180	62/194	60/188	58/181	56/175	54/169	0.10/75	0.16/119	0.23/171	0.29/216	0.35/261
50/150	52/163	50/157	48/150	46/144	44/138	0.09/67	0.15/112	0.21/157	0.27/201	0.33/246
35/100	37/116	35/110	33/103	31/97	29/91	0.08/51	0.14/104	0.19/142	0.24/179	0.29/216
25/75	27/85	25/78	23/72	21/66	19/59	0.07/52	0.12/89	0.17/127	0.22/164	0.27/201
15/45	17/53	15/47	13/41	11/34	--	0.06/45	0.10/75	0.15/112	0.19/142	--

*GPH rating at 1725 RPM/60Hz and LPH rating at 1450 RPM/50Hz.

Performance based on pump tested with water at room temperature For certificate of compliance or declaration please visit www.proconpumps.com or email productcompliance@proconpump.com

PROCONI®

PT Watermart Perkasa
Email: sales@water.co.id Phone: +62-21-316-1671
Whatsapp (text only): +62815-8609-3500
Website: www.water.co.id

