

HYDROPRO

ULTRAVIOLET

HYDROPRO ULTRAVIOLET is a UV sterilizer is the most environmental protection, effective, safety and economical way to kill all bacteria, viruses, yeast, mold and algae, without adding any chemicals, so it takes no harm to human body and environment. It is recommended that the water does not exceed following maximum concentration levels:

• Iron	< 0.3 mg/L(0.3ppm)	• Manganese	< 0.05 mg/L(0.05ppm)
• Hydrogen Sulphide	< 0.05 mg/L(0.05ppm)	• Hardness	< 7 gpg
• Total Suspending Solids	< 10 mg/L (10ppm)	• UV Transmittance	> 75%
• Turbidity	< 1 NTU		

SIZING

- HUV-L02, Flowrate: 2GPM (30mj/cm²)
- HUV-L06, Flowrate: 6GPM (30mj/cm²)

INSTALLATION TIPS

The UV Sterilizer is on and in operation when the power is switched on and the green light on the ballast is illuminated. A problematic lamp will be indicated by the red light on the ballast illuminating and by a buzzing sound being emitted from the ballast.

APPLICATION

- Food and beverage
- Hospital
- Breweries
- Swimming pool
- Spa
- Water treatment plants
- Drinking water
- Industrial and municipal wastewater
- Fish farms
- Aquaculture
- Pharmaceutical industry

FUNCTION

- Mechanical polished 304 stainless steel chamber
- 9000 hour lamp life span
- Low power consumption.
- Ballast power indicator light.
- Audible Lamp Failure.
- Running Time Meter.
- UV inten

OPERATION TIPS

If your water chemistry has a higher concentration of leaves it is advisable to undergo appropriate pre-treatment to address these water issues before installing your UV disinfection system. Ensuring proper pre-treatment is crucial to ensure the UV disinfection system functions effectively as intended.



HYDROPRO

ULTRAVIOLET

SPECIFICATIONS

FLOW RATE		HUV-L02	HUV-L06
@16mj/cm ² (US Public Health Standard)		3.3GPM	11GPM
@30mj/cm ² (Industry/ Manufacturers Standard)		2GPM	6GPM
@40mj/cm ² (NSF Standard)		1.5GPM	4.5GPM
UV Lamp		1*14W	1*21W
Dimension	Length	352mm	505mm
	Width	50.8mm	63mm
	Height	76.8mm	89mm
Inlet/Outlet		NPT 3/4"	NPT 3/4"
Visual "Power-On"		Yes	Yes
Audible Lamp Failure		Yes	Yes
Housing Material **		SS304	SS304

* All the specifications are subject to change without notice.

PARTS BREAKDOWN

No.	Part Name	Quantity
1	Waterproof Connector	1
2	Lamp Connector	1
3	Plastic nut	1
4	O-Ring	1
5	UV Lamp	1
6	Quartz Sleeve	1
7	Housing	1
8	Bracket	2
9	Ballast	1
10	Spring *	1


*** For vertical installation only, put the spring into the quartz sleeve before lamp installation.

WORKING CONDITION

- Water temperature : 5°C - 40°C
- Ambient temperature : -5°C - 40°C
- Ambient humidity : ≤93%
- Maximum operating pressure : 100PSI

WARRANTY

HYDROPRO UV comes with a one-year warranty, guaranteeing it against any manufacturing defects in workmanship and materials for a specified period from the date of the original invoice to the buyer. This warranty is applicable when the product is used as per the guidelines outlined in the installation, operating, and maintenance instruction manual and as legally implied.

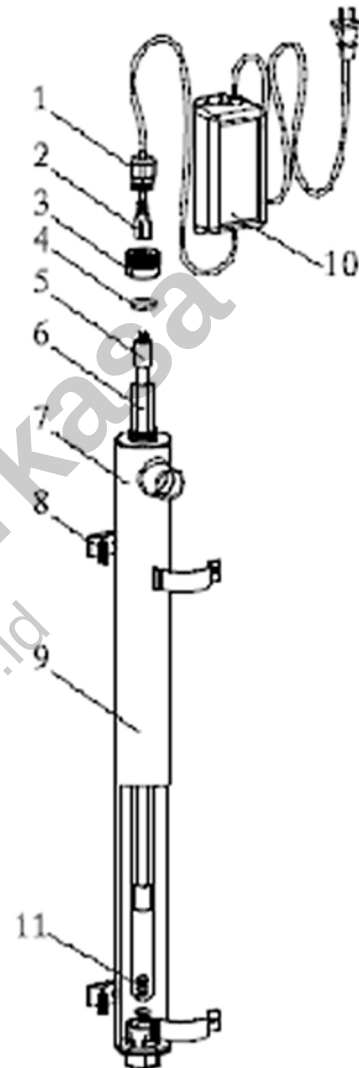

HYDROPRO

HYDROPRO



PT Watermart Perkasa
Email: sales@water.co.id Phone: +62-21-316-1671
Whatsapp (text only): +62815-8609-3500
Website: www.water.co.id